
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

DOUBLE DECK TERMINALS - FRKD/FSLD 2.5MM²

FRKD,FSLD,

3206.5
FRKD 2,5/3A BU

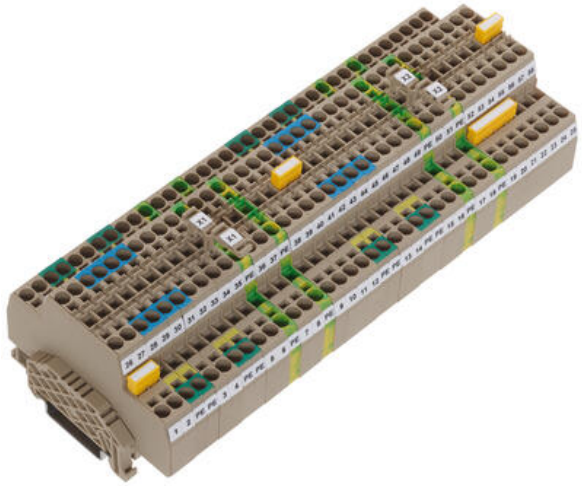

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	2.5 mm²
Colour	Blue
Rated voltage IEC	500 V
Rated current IEC	24 A
Mounting	TS 35
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Approvals	KEMA KUR, EAC

DIMENSIONS

Length	97.5 mm
Width	5.1 mm
Height TS 35/7.5	52.5 mm

CONNECTION DATA

Connections	2 x 3
Number of levels	2
Plug gauge acc. EN 60 947-1	A3

Cross connect channels	2
Cross section single wire from	0.2 mm²
Cross section single wire to	4 mm²
Cross section stranded wire from	0.2 mm²
Cross section stranded wire to	4 mm²
Cross section stranded with ferrule from	0.2 mm²
Cross section stranded with ferrule to	2.5 mm²
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Stripping length	12 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-1:2009

ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	18.42 g
Pack size	50