OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SUCO 0530 ELECTRONIC PRESSURE SWITCH

053060241B002
PNP output (High Side), NO, 0-600 Bar, G 1/4 – DIN EN ISO 1179-2, M12 - DIN EN 61076-2-101-A



- One switching output
- Stainless steel & titanium wetted parts
- Silicon-on-sapphire technology
- Factory set

PRODUCT DESCRIPTION

The SUCO 0530 is a high-performance electronic pressure switch featuring a rugged hex 22 stainless steel housing and titanium-wetted parts, designed for demanding environments. It uses a precision Silicon-on-Sapphire (SOS) sensing element for exceptional accuracy, low temperature drift, and long-term stability. This model provides a single PNP output with a “normally open” function, factory-set switching point and hysteresis, and high over-pressure protection to ensure safety under unexpected pressure spikes. It supports multiple pressure ranges up to 1,650 bar, thread options including G¼, NPT, UNF, M10/M14, and electrical connector choices like Deutsch DT04, AMP Superseal, M12, bayonet, or pre-fitted cable, all rated to IP67/IP6K9K for water and dust resistance.
Built for rugged industrial and mobile-hydraulic use, the 0530 excels in situations requiring reliable pressure monitoring under harsh conditions. Typical applications include hydraulic systems in construction machinery, mobile equipment, pneumatic systems, and even high-pressure applications in test benches or process lines. The SOS sensor ensures rapid detection and long-term measurement consistency, while the all-welded stainless steel/titanium design resists corrosion and eliminates elastomer seals, ideal for harsh media and high change-rate pressures. With robust connector choices and factory-set parameters, it offers plug-and-play integration, minimal setup, and reliable performance, making it a trusted choice for sectors like heavy machinery, off-road vehicles, marine hydraulics, and industrial automation.

TECHNICAL DATA

GENERAL DATA

Adjustment range max	600 bar
Adjustment range min	0 bar
Electrical connection	M12x1
Process connection	1/4 BSP
Function	Normally open
Output	PNP
Burst pressure	2000 bar
Pressure max	1650 bar

TEMPERATURE & MATERIALS DATA

Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C


Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA


Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 … 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g


SAFETY & APPROVALS

IP class	IP67
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale



Pin 1	Uv+
Pin 2	nc
Pin 3	Gnd
Pin 4	Out



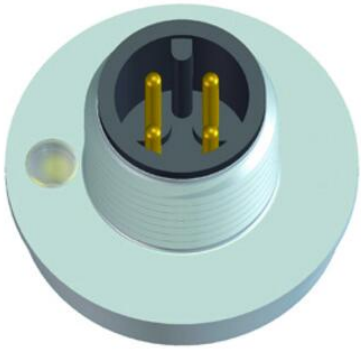

DIN EN 175301-803-A



Pin	Assignment
1	Uv+
2	Out
3	Gnd
PE	⏚

IP65

x ~ 60 / 76 mm*

d ~ Ø 30 mm

Order number: 001

* without coupler socket x ~ 60 mm, with coupler socket x ~ 75 mm

M 12 – DIN EN 61076-2-101 A



Pin	Assignment
1	Uv+
2	nc
3	Gnd
4	Out

IP67

x ~ 54 mm

d ~ Ø 22 mm

Order number: 002

ISO 15170-A1-K.1



Pin	Assignment
1	Uv+
2	nc
3	Gnd
4	Out

IP67, IP69K

x ~ 65 mm mm

d ~ Ø 27 mm

Order number: 004

AMP Superseal



Pin	Assignment
1	Out
2	Gnd
3	Uv+

IP67

x ~ 73 mm

d ~ Ø 26 mm

Order number: 007

DEUTSCH DT04-4P



Pin	Assignment
1	Gnd
2	Uv+
3	nc
4	Out

IP67, IP69K

x ~ 74 mm

d ~ Ø 23 mm

Order number: 004

DEUTSCH DT04-3P



Pin	Assignment
A	Uv+
B	Gnd
C	Out

IP67, IP69K

x ~ 74 mm

d ~ Ø 23 mm

Order number: 010

Cable connection



Cable	Assignment
red	Uv+
white	Out
black	Gnd

IP67

x ~ 64 mm
(+ 20 mm bend relief)
cable length ~ 2 m

d ~ Ø 22 mm

Order number: 011



Thread code: 41



Thread code: 03



Thread code: 04



Thread code: 09



Thread code: 20



Thread code: 20



Thread code: 21




Thread code: 42



hex 22


Connection diagrams

High Side Output (PNP)



Pin assignment depending on elect. connection
*OUT2 only for 05xx

Low Side Output (NPN)



Pin assignment depending on elect. connection
*OUT2 only for 05xx

Technical modifications and errors excepted.

DIN EN 175301-803-A



Pin	Assignment
1	Uv+
2	Out
3	Gnd
PE	⏚

IP65

x ~ 60 / 76 mm*

d ~ Ø 30 mm

Order number: 001

* without coupler socket x ~ 60 mm, with coupler socket x ~ 75 mm

M 12 – DIN EN 61076-2-101 A



Pin	Assignment
1	Uv+
2	nc
3	Gnd
4	Out

IP67

x ~ 54 mm

d ~ Ø 22 mm

Order number: 002

ISO 15170-A1-K.1



Pin	Assignment
1	Uv+
2	nc
3	Gnd
4	Out

IP67, IP69K

x ~ 65 mm mm

d ~ Ø 27 mm

Order number: 004

AMP Superseal



Pin	Assignment
1	Out
2	Gnd
3	Uv+

IP67

x ~ 73 mm

d ~ Ø 26 mm

Order number: 007

DEUTSCH DT04-4P



Pin	Assignment
1	Gnd
2	Uv+
3	nc
4	Out

IP67, IP69K

x ~ 74 mm

d ~ Ø 23 mm

Order number: 004

DEUTSCH DT04-3P



Pin	Assignment
A	Uv+
B	Gnd
C	Out

IP67, IP69K

x ~ 74 mm

d ~ Ø 23 mm

Order number: 010

Cable connection



Cable	Assignment
red	Uv+
white	Out
black	Gnd

IP67

x ~ 64 mm
(+ 20 mm bend relief)
cable length ~ 2 m

d ~ Ø 22 mm

Order number: 011



Thread code: 41



Thread code: 03



Thread code: 04



Thread code: 09



Thread code: 20



Thread code: 20



Thread code: 21




Thread code: 42



hex 22


Connection diagrams

High Side Output (PNP)



Pin assignment depending on elect. connection
*OUT2 only for 05xx

Low Side Output (NPN)



Pin assignment depending on elect. connection
*OUT2 only for 05xx

Technical modifications and errors excepted.