



## SUCO 0530 ELECTRONIC PRESSURE SWITCH

053025220B013  
PNP output (High Side), NO, 0-250 Bar, 7/16 – 20 UNF,  
DIN EN 175301-803-A

- One switching output
- Stainless steel & titanium wetted parts
- Silicon-on-sapphire technology
- Factory set



### PRODUCT DESCRIPTION

The Suco high performance series of electronic pressure switches offers outstanding overpressure protection (up to 4x), long service life even under high pressure change rates whilst giving very low temperature error and excellent long-term stability. Using Silicon-on-sapphire technology for high reliability, EMC compatibility and accuracy there are five standard pressure ranges starting at 0-10 bar all the way up to 0-600 bar and a hysteresis of 0.2%-99.8%. Output option of PNP or NPN and the choice of normally open or normally closed with one switching output factory set (unadjustable by the user). The wetted parts are made of stainless steel and titanium in an all welded design ensuring excellent media compatibility with seven standard electrical connection options including Deutsch, DIN and M12 combined with eight standard thread type options.

Customer specific solutions are also available on request.

#### Application examples

- Automotive
- Braking systems
- Medical
- Mobile hydraulics
- Off highway
- Off-shore
- Rail

## TECHNICAL DATA

### GENERAL DATA

Adjustment range max	250 bar
Adjustment range min	0 bar
Electrical connection	DIN EN 175301-803-A
Function	Normally open (SPST)
Output	PNP

<b>Burst pressure</b>	2000 bar
<b>Pressure max</b>	1000 bar

## TEMPERATURE & MATERIALS DATA



<b>Temperature of media from</b>	-40 °C
<b>Temperature of media to</b>	125 °C
<b>Temperature ambient from</b>	-40 °C
<b>Temperature ambient to</b>	100 °C
<b>Material of body</b>	Stainless steel 1.4305
<b>Material of wetted parts</b>	Stainless steel 1.4305, Titanium

## ADDITIONAL DATA

<b>Supply voltage dc max</b>	32 V DC
<b>Supply voltage dc min</b>	9.6 V DC
<b>Pressure rise</b>	≤ 5,000 bar/s
<b>Switching time</b>	< 2 ms
<b>Switching point adjustment range</b>	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
<b>Weight</b>	110 g

## SAFETY & APPROVALS

<b>IP class</b>	IP65
<b>Hysteresis</b>	2..99.8% of nominal pressure range (full scale), programmable at factory
<b>Shock resistance</b>	500m / s <sup>2</sup> ; 11 ms half sine wave; DIN EN 60068-2-27
<b>Vibration resistance</b>	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
<b>EMC</b>	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
<b>Accuracy</b>	±0.5 % of adjustment range (Full scale) at room temperature
<b>Long term stability</b>	±0.1 % of adjustment range (full scale) per year
<b>Mechanical life expectancy</b>	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
<b>Repeatability</b>	±0.1 % full scale

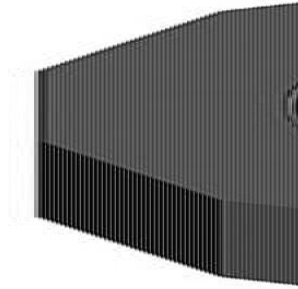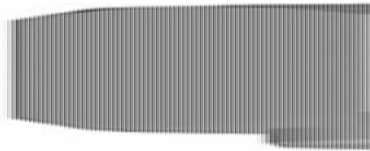

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4.1	AMP Superseal																																								
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
IP67 • 50 mm max. • 10 mm max. Order number: 001 Order number: 002	IP67 • 54 mm max. • 10 mm max. Order number: 001 Order number: 002	IP67, IP68 • 45 mm max. • 10 mm max. Order number: 004 Order number: 005	IP67 • 73 mm max. • 10 mm max. Order number: 007 Order number: 008																																								
* without cable (cable) = 0.5m, with cable (cable) = 1.5m																																											
<b>DEUTSCH DT04-4P</b>																																											
		<b>Cable connection</b> 																																									
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	<table><tr><th>Cable</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>		Cable	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1												
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
Cable	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
IP67 • 58 mm max. • 10 mm max. Order number: 004 Order number: 005	IP67 • 58 mm max. • 10 mm max. Order number: 010 Order number: 011	IP67 • 64 mm max. • 20 mm max. (cable shield) cable length = 1 m • 10 mm max. Order number: 011 Order number: 012																																									
Thread code: 41	Thread code: 42	Thread code: 43	Thread code: 44																																								
Thread code: 45	Thread code: 46	Thread code: 47	Thread code: 48																																								



Fig. 22

Connection diagrams

up to 100 VDC



up to 100 VDC



Technical modifications and errors excepted.

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15176-A1-4.1	AMP Superseal																																								
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
IP67 K = 40 / 50 mm Ø = 12 mm	IP67 K = 50 mm Ø = 12 mm	IP67 PROTEK K = 45 mm Ø = 22 mm	IP67 K = 71 mm Ø = 18 mm																																								
Order number: 001 * without cable (cable) = 0.5m, with cable (cable) = 1.5m	Order number: 002	Order number: 005	Order number: 001																																								
DEUTSCH DT04-4P																																											
		Cable connection 																																									
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr><tr><td>4</td><td>Ch1</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	4	Ch1	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Ch+</td></tr><tr><td>2</td><td>Ch-</td></tr><tr><td>3</td><td>Ch0</td></tr></table>	Pin	Assignment	1	Ch+	2	Ch-	3	Ch0	Cable Assignment 1. Ch+ 2. Ch- 3. Ch0 4. Ch1																							
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
4	Ch1																																										
Pin	Assignment																																										
1	Ch+																																										
2	Ch-																																										
3	Ch0																																										
IP67 PROTEK K = 30 mm Ø = 12 mm	IP67 PROTEK K = 30 mm Ø = 12 mm	IP67 K = 44 mm Ø = 22 mm cable length = 2 m																																									
Order number: 004	Order number: 008	Order number: 011																																									



Fig. 22

Connection diagrams

up to 100 VDC



up to 100 VDC



Technical modifications and errors excepted.