



SUCO 0531 ELECTRONIC PRESSURE SWITCH

053110109B008
PNP output (High Side), NC, 0-10 Bar, NPT 1/4,
Deutsch DT04-4P

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Adjustment range max	10 bar
Adjustment range min	0 bar
Electrical connection	Deutsch DT04-4P
Process connection	1/4 NPT
Function	Normally Closed (SPST)
Output	PNP
Burst pressure	80 bar
Pressure max	40 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g

SAFETY & APPROVALS

IP class	IP67, IP6K9K
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g; 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

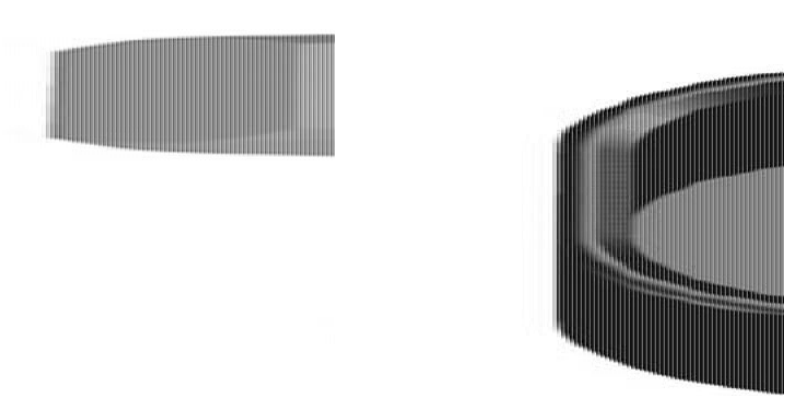



The figure displays eight technical drawings of various bolt head profiles, arranged in two rows of four. Each drawing includes specific dimensions and labels:

- Thread code 41:** Dimensions include \$D_{max}\$, \$H\$, \$R_{min}\$, \$P_{min}\$, \$C_{1/4}\$, \$D_{min} \geq D_0\$ (ISO 913), and \$D_{min} \geq 1.1 \times d\$. Labels: "Hex", "locking ring".
- Thread code 43:** Dimensions include \$H\$, \$R_{min}\$, \$C_{1/4}\$, and \$D_{min} \geq 1.1 \times d\$. Label: "Hex".
- Thread code 45:** Dimensions include \$H\$, \$R_{min}\$, and \$D_{min} \geq 1.1 \times d\$. Label: "Hex".
- Thread code 49:** Dimensions include \$H\$, \$R_{min}\$, and \$D_{min} \geq 1.1 \times d\$. Label: "Hex".
- Thread code 50:** Dimensions include \$H\$, \$R_{min}\$, and \$D_{min} \geq 1.1 \times d\$. Label: "Hex".
- Thread code 52:** Dimensions include \$H\$, \$R_{min}\$, and \$D_{min} \geq 1.1 \times d\$. Label: "Hex".
- Thread code 51:** Dimensions include \$H\$, \$R_{min}\$, and \$D_{min} \geq 1.1 \times d\$. Label: "Hex".
- Thread code 62:** Dimensions include \$D_{max}\$, \$H\$, \$R_{min}\$, \$P_{min}\$, \$C_{1/4}\$, \$D_{min} \geq D_0\$ (ISO 913), and \$D_{min} \geq 1.1 \times d\$. Labels: "Hex", "locking ring".