



SUCO 0531 ELECTRONIC PRESSURE SWITCH

053125130B010
PNP output (High Side), NC, 0-25 Bar, M10x1 zyl. DIN
3852-A, Deutsch DT04-3P

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

The SUCO 0541 is a compact, high-performance electronic pressure switch engineered with dual PNP outputs, both configured as normally closed. Encased in a durable hex-22 stainless-steel and titanium-wetted housing, it utilises Silicon-on-Sapphire (SoS) sensor technology to deliver precision and long-term stability, while offering high overpressure protection up to 4× the rated pressure. Available in pressure ranges spanning 0–10 bar to 0–600 bar, the 0541 switch supports switching currents up to 500 mA and responds rapidly under demanding conditions with pressure change rates reaching 5,000 bar/s. Factory-set switching points and hysteresis (0.2–99.8 % FS) ensure reliable performance, with a sealed welded design eliminating elastomer seals and meeting IP67 and industrial EMC standards.

The 0541 excels in harsh hydraulic and pneumatic environments, such as construction machinery, mobile hydraulic systems, off-road vehicles, and industrial automation, where compact size, durable construction, and reliable switching under dynamic pressures are essential. Its dual NC PNP outputs allow for redundant or staged switching logic in safety circuits or PLC-controlled systems, ideal for overpressure alarms, machine shutdowns, or interlock functions. The fast response time, high resistance to pressure peaks, and welded sensor design make it particularly suitable for vibration-heavy or wash-down settings. Furthermore, the availability of diverse process threads and electrical connectors ensures seamless integration into OEM systems requiring rugged, precise, and dependable pressure monitoring.

TECHNICAL DATA

GENERAL DATA

Adjustment range max	25 bar
Adjustment range min	0 bar
Electrical connection	Deutsch DT04-3P
Process connection	M10x1
Function	Normally Closed
Output	PNP
Burst pressure	200 bar
Pressure max	100 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	80 g


SAFETY & APPROVALS

IP class	IP67, IP6K9K
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s ² ; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

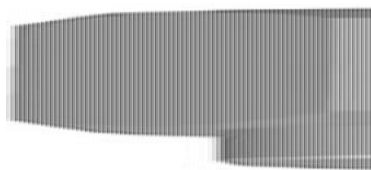

hex 221

Connection diagram



Pin placement according to each connection



Pin placement according to each connection

Technical modifications and errors excepted.

DIN EN 175305-803-A		M 12 - DIN EN 61076-3-103-A		ISO 15170-A1-4-1		AMP Superseal	
Pin	Assignment	Pin	Assignment	Pin	Assignment	Pin	Assignment
1	Grnd	1	Ultra	1	Ultra	1	Grnd
2	Grnd	2	nc	2	nc	2	Grnd
3	Grnd	3	Grnd	3	Grnd	3	Grnd
4	Grnd	4	Grnd	4	Grnd	4	Ultra
IP67		IP67		IP67		IP67	
L = 60 / 70 mm*		L = 54 mm		L = 60 mm (max)		L = 71 mm	
Ø = Ø 23 mm		Ø = Ø 23 mm		Ø = Ø 23 mm		Ø = Ø 26 mm	
Order number: 001		Order number: 002		Order number: 003		Order number: 007	

* without copper socket = 60mm, with copper socket = 70mm



DEUTSCH DT04-4P		DEUTSCH DT04-3P		Cable connection	
Pin	Assignment	Pin	Assignment	Cable	Assignment
1	Grnd	A	Ultra	red	Ultra
2	Ultra	B	Grnd	white	Out
3	nc	C	Grnd	black	Grnd
4	Out	IP67		IP67	
L = 34 mm		L = 38 mm		L = 68 mm	
Ø = Ø 23 mm		Ø = Ø 23 mm		Ø = 25 mm (hard edd) cable length = 2m	
Order number: 006		Order number: 010		Order number: 011	

Thread code	Thread code	Thread code	Thread code
01	03	04	09
10	15	21	42



hex 23

Connection diagrams



Technical modifications and errors excepted.

DIN EN 175305-803-A		M 12 - DIN EN 61076-3-103-A		ISO 15170-A1-4-1		AMP Superseal	
Pin	Assignment	Pin	Assignment	Pin	Assignment	Pin	Assignment
1	Grnd	1	Ultra	1	Ultra	1	Grnd
2	Grnd	2	nc	2	nc	2	Grnd
3	Grnd	3	Grnd	3	Grnd	3	Grnd
4	Grnd	4	Grnd	4	Grnd	4	Ultra
IP67		IP67		IP67		IP67	
L = 60 / 70 mm*		L = 54 mm		L = 60 mm (max)		L = 71 mm	
Ø = Ø 23 mm		Ø = Ø 23 mm		Ø = Ø 23 mm		Ø = Ø 26 mm	
Order number: 001		Order number: 002		Order number: 003		Order number: 007	

* without copper socket = 60mm, with copper socket = 70mm

DEUTSCH DT04-4P		DEUTSCH DT04-3P		Cable connection	
Pin	Assignment	Pin	Assignment	Cable	Assignment
1	Grnd	A	Ultra	red	Ultra
2	Ultra	B	Grnd	white	Out
3	nc	C	Grnd	black	Grnd
4	Out	IP67		IP67	
L = 34 mm		L = 38 mm		L = 68 mm	
Ø = Ø 23 mm		Ø = Ø 23 mm		Ø = 25 mm (hard edd) cable length = 2m	
Order number: 006		Order number: 010		Order number: 011	

Thread code	Thread code	Thread code	Thread code
01	03	04	09
10	15	21	42