



SUCO 0533 ELECTRONIC PRESSURE SWITCH

053310221B011

NPN output (Low Side), NC, 0-100 Bar, 9/16 – 18 UNF,
Cable connection

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Adjustment range max	100 bar
Adjustment range min	0 bar
Electrical connection	Embedded 2m cable
Process connection	9/16-18UNF
Function	Normally Closed (SPST)
Output	NPN
Burst pressure	800 bar
Pressure max	400 bar

TEMPERATURE & MATERIALS DATA


Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	135 g

SAFETY & APPROVALS

IP class	IP67
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s²; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g; 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

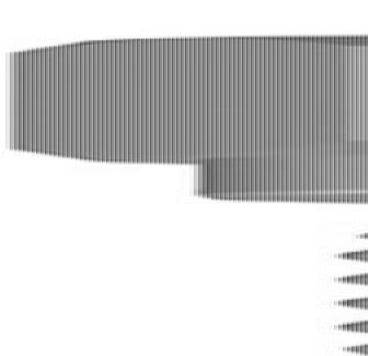


DIN EN 175305-803-A




h=40 mm
Ø=22 mm

Connection diagrams



Do not connect directly to each other
Vcc I+ I- 0V



Do not connect directly to each other
Vcc V+ V- 0V

Technical modifications and errors excepted.

DN EN 175301-803-A	M 12 - DIN EN 61076-2-001 A	ISO 15715-A1-4-1	AMP Superseal																																								
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>Out</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 Ø = 60 / 76 mm Ø = 10 mm Order number: 001 * without copper shield - 4 pins, with copper shield - 5 pins	Pin	Assignment	1	Vcc	2	Out	3	Gnd	4	Out	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>In</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 Ø = 54 mm Ø = 10 mm Order number: 002	Pin	Assignment	1	Vcc	2	In	3	Gnd	4	Out	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>In</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 Ø = 65 mm Ø = 10 mm Order number: 004	Pin	Assignment	1	Vcc	2	In	3	Gnd	4	Out	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Out</td></tr><tr><td>2</td><td>Gnd</td></tr><tr><td>3</td><td>Vcc</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 Ø = 73 mm Ø = 10 mm Order number: 003	Pin	Assignment	1	Out	2	Gnd	3	Vcc	4	Out
Pin	Assignment																																										
1	Vcc																																										
2	Out																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Vcc																																										
2	In																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Vcc																																										
2	In																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Out																																										
2	Gnd																																										
3	Vcc																																										
4	Out																																										
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection																																									
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Gnd</td></tr><tr><td>2</td><td>Vcc</td></tr><tr><td>3</td><td>V+</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 Ø = 38 mm Ø = 10 mm Order number: 008	Pin	Assignment	1	Gnd	2	Vcc	3	V+	4	Out	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>A</td><td>Vcc</td></tr><tr><td>B</td><td>Gnd</td></tr><tr><td>C</td><td>Out</td></tr></table> IP67 Ø = 38 mm Ø = 10 mm Order number: 009	Pin	Assignment	A	Vcc	B	Gnd	C	Out	<table><tr><th>Color</th><th>Assignment</th></tr><tr><td>Red</td><td>Vcc</td></tr><tr><td>White</td><td>Out</td></tr><tr><td>Black</td><td>Gnd</td></tr></table> IP67 Ø = 64 mm Ø = 20 mm (cable length = 2 m) Ø = 10 mm Order number: 011	Color	Assignment	Red	Vcc	White	Out	Black	Gnd															
Pin	Assignment																																										
1	Gnd																																										
2	Vcc																																										
3	V+																																										
4	Out																																										
Pin	Assignment																																										
A	Vcc																																										
B	Gnd																																										
C	Out																																										
Color	Assignment																																										
Red	Vcc																																										
White	Out																																										
Black	Gnd																																										
Thread code: 01	Thread code: 02	Thread code: 03	Thread code: 04																																								
Thread code: 05	Thread code: 06	Thread code: 07	Thread code: 08																																								