



SUCO 0533 ELECTRONIC PRESSURE SWITCH

053325220B011

NPN output (Low Side), NC, 0-250 Bar, 7/16 – 20 UNF,
Cable connection

- One Switching Output
- Stainless Steel & Titanium Wetted Parts
- Silicon-On-Sapphire Technology
- Factory Set



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Adjustment range max	250 bar
Adjustment range min	0 bar
Electrical connection	Embedded 2m cable
Function	Normally Closed (SPST)
Output	NPN
Burst pressure	2000 bar
Pressure max	1000 bar

TEMPERATURE & MATERIALS DATA



Temperature of media from	-40 °C
Temperature of media to	125 °C
Temperature ambient from	-40 °C
Temperature ambient to	100 °C
Material of body	Stainless steel 1.4305
Material of wetted parts	Stainless steel 1.4305, Titanium

ADDITIONAL DATA

Supply voltage dc max	32 V DC
Supply voltage dc min	9.6 V DC
Pressure rise	≤ 5,000 bar/s
Switching time	< 2 ms
Switching point adjustment range	2 ... 100 % of the nominal pressure range Full Scale (FS), programmable at factory
Weight	135 g

SAFETY & APPROVALS


IP class	IP67
Hysteresis	2..99.8% of nominal pressure range (full scale), programmable at factory
Shock resistance	500m / s ² ; 11 ms half sine wave; DIN EN 60068-2-27
Vibration resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
EMC	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007
Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Long term stability	±0.1 % of adjustment range (full scale) per year
Mechanical life expectancy	10,000,000 switching cycles at rise rates to 5,000 bar/s nominal pressure
Repeatability	±0.1 % full scale

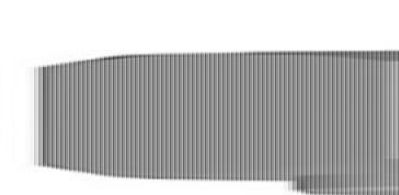




haz 221

Connection diagrams



Do not connect directly to each connector
Vcc 2 only for 0-5V



Do not connect directly to each connector
Vcc 2 only for 0-5V

Technical modifications and errors excepted.

DN EN 175301-803-A	M 12 - DN EN 61076-2-001 A	ISO 15715-A1-4.1	AMP Superseal																																								
																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>Out</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 60 / 70 mm² • Ø 10 mm Order number: 000	Pin	Assignment	1	Vcc	2	Out	3	Gnd	4	Out	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>In</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 54 mm • Ø 11 mm Order number: 002	Pin	Assignment	1	Vcc	2	In	3	Gnd	4	Out	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Vcc</td></tr><tr><td>2</td><td>In</td></tr><tr><td>3</td><td>Gnd</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 65 mm • Ø 11 mm Order number: 004	Pin	Assignment	1	Vcc	2	In	3	Gnd	4	Out	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Out</td></tr><tr><td>2</td><td>Gnd</td></tr><tr><td>3</td><td>Vcc</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 71 mm • Ø 16 mm Order number: 007	Pin	Assignment	1	Out	2	Gnd	3	Vcc	4	Out
Pin	Assignment																																										
1	Vcc																																										
2	Out																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Vcc																																										
2	In																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Vcc																																										
2	In																																										
3	Gnd																																										
4	Out																																										
Pin	Assignment																																										
1	Out																																										
2	Gnd																																										
3	Vcc																																										
4	Out																																										
*without-cable socket = GND, with-cable socket = Vcc																																											
DEUTSCH DT04-4P	DEUTSCH DT04-3P	Cable connection																																									
																																											
<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>1</td><td>Gnd</td></tr><tr><td>2</td><td>Vcc</td></tr><tr><td>3</td><td>Vcc</td></tr><tr><td>4</td><td>Out</td></tr></table> IP67 • 38 mm • Ø 11 mm Order number: 008	Pin	Assignment	1	Gnd	2	Vcc	3	Vcc	4	Out	<table><tr><th>Pin</th><th>Assignment</th></tr><tr><td>A</td><td>Vcc</td></tr><tr><td>B</td><td>Gnd</td></tr><tr><td>C</td><td>Out</td></tr></table> IP67 • 38 mm • Ø 11 mm Order number: 009	Pin	Assignment	A	Vcc	B	Gnd	C	Out	<table><tr><th>Color</th><th>Assignment</th></tr><tr><td>Red</td><td>Vcc</td></tr><tr><td>White</td><td>Out</td></tr><tr><td>Black</td><td>Gnd</td></tr></table> IP67 • 64 mm • 20 mm band width • Cable length = 2 m • Ø 11 mm Order number: 011		Color	Assignment	Red	Vcc	White	Out	Black	Gnd														
Pin	Assignment																																										
1	Gnd																																										
2	Vcc																																										
3	Vcc																																										
4	Out																																										
Pin	Assignment																																										
A	Vcc																																										
B	Gnd																																										
C	Out																																										
Color	Assignment																																										
Red	Vcc																																										
White	Out																																										
Black	Gnd																																										
																																											
Thread code: 01	Thread code: 02	Thread code: 03	Thread code: 04																																								
																																											
Thread code: 05	Thread code: 06	Thread code: 07	Thread code: 08																																								