OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# NON-ILLUMINATED MUSHROOM HEADS

Non Illuminated

L22DC01
Mushroom Head Dia. 32mm Pull Reset Red



- IP66 / IP69K
- Head size Ø32mm or Ø40mm
- Pull, turn or key reset
- Various colour & text options

### PRODUCT DESCRIPTION

Non illuminated, latching mushroom heads that mount in a 22.5mm hole with protection rating IP66 / IP69K

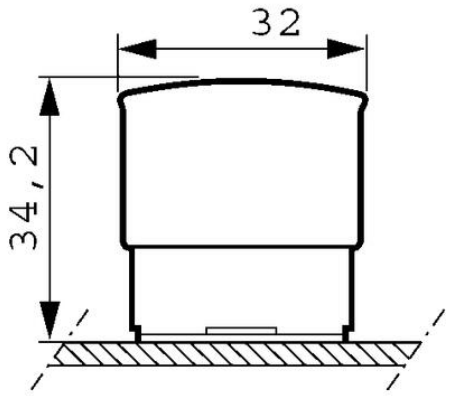
Available in head sizes Ø32mm & Ø40mm with reset options of pull, turn & key release.

Combine with separate clip and contact blocks to make a complete mushroom head assembly.

## TECHNICAL DATA

| | |
|---|---|
| **Type** | Mushroom ø32mm |
| **Function** | Pull to reset |
| **Colour** | Red |
| **Illuminated** | No |

| | |
|---|---|
| **IP class** | IP66, IP69, IP69K |
| **Impact resistance** | IK05 |
| **Temperature operational min** | -25 °C |
| **Temperature operational max** | 70 °C |
| **Storage temperature min** | -40 °C |
| **Storage temperature max** | 70 °C |
| **Mechanical life expectancy** | 150 000 cycles |
| **Approvals** | UL 508, CSA 22.2, BV, CB, CE |
| **Recommended tightening torque** | 3 |
| **Climatic resistance - cyclic damp heat** | IEC 60068-2-30 |
| **Climatic resistance - sea air** | IEC 60068-2-52 |
| **Climatic resistance - constant humid heat** | IEC 60068-2-3 |


32
34,2