OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CLIPS

Mounting clips for contact & LED blocks

333E
3 Module Clip




- 1, 3 & 5 module clips
- Robust metal locking lever
- Mount up to 6 blocks

PRODUCT DESCRIPTION

Mounting clips are used to assemble contact blocks & LED blocks in the required configuration.
They interface with all pushbutton, selector switch, key switch, mushroom & pilot light heads.
Available in 1 way, 3 way or 5 way for up to 5 blocks.
Contacts can be double stacked on the 1 & 3 way clips to achieve up to the maximum 6 blocks.
LED blocks must always be placed in the center position.
1 way clips simply snap into place and are removed by pinching the plastic release tabs.
3 & 5 way clips lock in place with a robust metal lever to ensure a secure connection.

TECHNICAL DATA

Temperature operational min	-25 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	70 °C
Weight	11 g
Approvals	UL 508, CSA 22.2, BV, CB, CE
Climatic resistance - cyclic damp heat	IEC 60068-2-30
Climatic resistance - sea air	IEC 60068-2-52
Climatic resistance - constant humid heat	IEC 60068-2-3

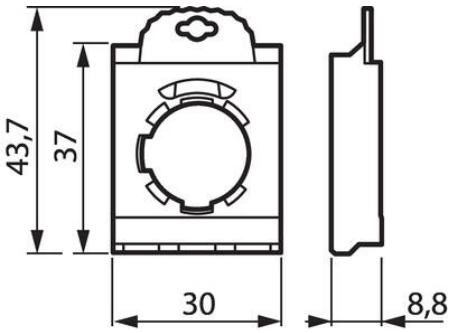

For 3 position selector switches

Handle
(View from front of panel)



Contacts block actuation
(View from front of panel)

