

C10 INTERFACE RELAY

1-pole 10 A - IRC

C10A10230A
 Relay 5 Pin 1 Pole 230V ac

- Robust flat pins, for industrial applications
- Both mechanical and LED indication
- Colour-coded test button
- Twin contact for low loads



PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Nominal power ac	1.1 VA
Coil voltage ac	230 V AC
Oversvoltage UNX max	1.1
Tripping voltage max UN	0.1

OUTPUT DATA


Number of contacts	1
Contact material	AgNi
Breaking Voltage	250 V
Breaking capacity current	10 A
Recommended min load	10 mA / 10 V
Mechanical life expectancy	AC:10 Mill./DC:20 Mill
Surge current (20 ms)	30 A
Release time	5 ms
Release time + contact debounce	8 ms

GENERAL DATA

IP class	IP40
Insulation class EN60947	250 V (pollution 3, Group C)

Temperature operational min	-40 °C
Storage temperature min	-40 °C
Storage temperature max	80 °C
Temperature operational max	70 °C
Frequency	50 Hz
Approvals	CCC, CE, CSA, Gost R, RoHS, UL
Type of relay	Industrial relay



Gap:
0,5 mm



C10-A10

10A 250V AC-1
10A 30V DC-1

03

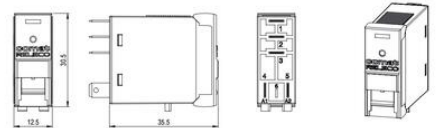


A2 —□— A1

CE EAC


Made in India





Gap:
0,5 mm




Gap:
1 mm




Gap:
0,5 mm

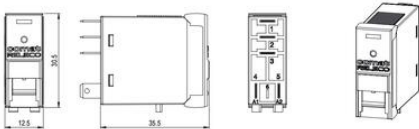

Gap:
0,5 mm



Gap:
1 mm



Gap:
0,5 mm

