OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

VALCO - STAINLESS STEEL SIDE MOUNT LEVEL SWITCH - SML SERIES

00.0002.9103
100mm length, SS, CO, 1.5M cable, Max 30 bar



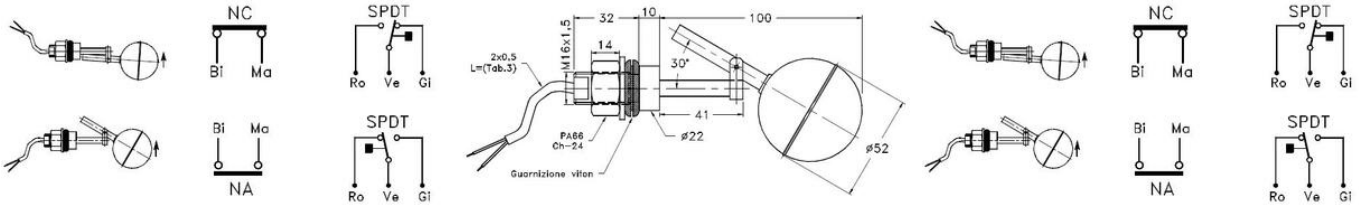
- Standard item side mounting position
- N.1 reed switch contact NA/NC/SPDT
- Maximum working pressure 30 Bar
- Maximum working temperature 110°C
- IP65 protection

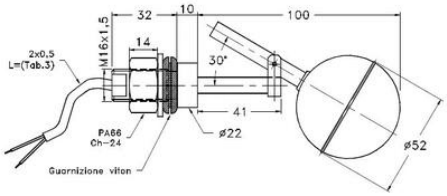
PRODUCT DESCRIPTION

This level switch, with its reduced overall dimensions and simplicity of installation, offers a reliable solution for the control of liquids in all applications where it is necessary to mount a lateral type. The standard version is for installation from inside the tank, on request, execution with possibility of mounting from outside the tank are available

TECHNICAL DATA

Current	0.5AC/0.5DC
Electrical connection	Pre-cabled 1.5m
Function	Changeover (SPDT)
Hysteresis max	8 mm
IP class	IP65
Manufacturer part no.	L1.S52.SML.7D.16.KS.C1L
Material of float	Stainless steel 316
Material of seals	FKM
Material of wetted parts	Stainless steel 316
Pressure max	30 bar
Process connection	M16x1.5
Specific gravity	0.67
Temperature operational max	110 °C
Voltage	150AC/150DC


NC
Bi
Ma
SPDT
Ro
Ve
Gi
Bi
Ma
NA
SPDT
Ro
Ve
Gi
32
10
100
M16x1.5
14
30°
2x0.5
Lm(Tab.3)
PA66
Ch-24
41
ø22
ø52
Guarnizione viton
NC
Bi
Ma
SPDT
Ro
Ve
Gi
Bi
Ma
NA
SPDT
Ro
Ve
Gi


32
10
100
M16x1.5
14
30°
2x0.5
Lm(Tab.3)
41
PA66
Ch-24
ø22
ø52
Guarnizione viton