


KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX 5858/5878, OPTICAL, ETHERCAT, Ø58 MM

SERIE 5858 ETHERCAT

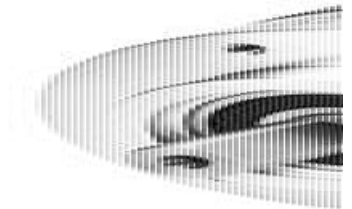

- Housing diameter Ø58 mm
- EtherCAT
- Safety-Lock™
- High enclosure class

PRODUCT DESCRIPTION

Sendix 5858/5878 is a one-way fieldbus transducer with EtherCAT in robust design. Thanks to the construction of Safety-Lock™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix 5858/5878 is available with LED indication, which facilitates diagnosis of the sensor and a set button that facilitates calibration.

Please refer to the image below for ordering information.


Order code Shaft version	8.5858 Type	.XXB2 a b c d	.B2 12 e
a Flange	b Shaft (ø x L), with flat	c Interface / power supply	e Fieldbus profile
1 = clamping flange, IP65 ø 58 mm [2.28"] 3 = clamping flange, IP67 ø 58 mm [2.28"] 2 = synchro flange, IP65 ø 58 mm [2.28"] 4 = synchro flange, IP67 ø 58 mm [2.28"] 5 = square flange, IP65 □ 63.5 mm [2.5"] 7 = square flange, IP67 □ 63.5 mm [2.5"]	1 = 6 x 10 mm [0.24 x 0.39"] ¹⁾ 2 = 10 x 20 mm [0.39 x 0.79"] ²⁾ 3 = 1/4" x 7/8" 4 = 3/8" x 7/8"	B = EtherCAT / 10 ... 30 V DC d Type of connection removable bus terminal cover 2 = 3 x M12 connector, 4-pin	B2= EtherCAT with CoE (CAN over EtherNet) Optional on request - Ex 2/22 - surface protection salt spray tested

Order code Hollow shaft	8.5878 Type	.XXB2 a b c d	.B2 12 e
a Flange	b Blind hollow shaft	c Interface / power supply	e Fieldbus profile
1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] 5 = with stator coupling, IP65 ø 63 mm [2.48"] 6 = with stator coupling, IP67 ø 63 mm [2.48"]	(insertion depth max. 30 mm [1.18"]) 3 = ø 10 mm [0.39"] 4 = ø 12 mm [0.47"] 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] 8 = ø 3/8" 9 = ø 1/2"	B = EtherCAT / 10 ... 30 V DC d Type of connection removable bus terminal cover 2 = 3 x M12 connector, 4-pin	B2= EtherCAT with CoE (CAN over EtherNet) Optional on request - Ex 2/22 - surface protection salt spray tested

TECHNICAL DATA

Connection	M12
Housing diameter	58 mm
IP class	IP65, IP67

Mounting	Shoulder
Output	EtherCAT
Sensor type	Absolute
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	10 V DC
Temperature operational max	80 °C
Temperature operational min	-40 °C
Version	Singleturn

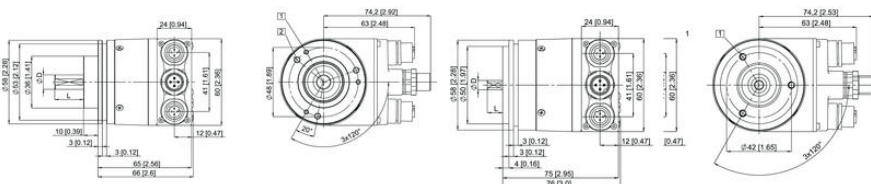

Type of connection 2, D-coded

Direction	Port A				Port B			
	Transmit data	Receive data	Transmit data	Receive data	Transmit data	Receive data	Transmit data	Receive data
Abbreviation	TxD+	RxD+	TxD-	RxD-	TxD+	RxD+	TxD-	RxD-
M12 PIN assignment	1	2	3	4	1	2	3	4

Port A and B

Terminal assignment power supply

Signal	+Vs power supply	n.c.	0V	n.c.
Abbreviation	+Vs	-	0V	-
M12 PIN assignment	1	2	3	4

Type of connection 2, D-coded

Direction	Port A				Port B			
	Transmit data	Receive data	Transmit data	Receive data	Transmit data	Receive data	Transmit data	Receive data
Abbreviation	TxD+	RxD+	TxD-	RxD-	TxD+	RxD+	TxD-	RxD-
M12 PIN assignment	1	2	3	4	1	2	3	4

Port A and B

Terminal assignment power supply

Signal	+Vs power supply	n.c.	0V	n.c.
Abbreviation	+Vs	-	0V	-
M12 PIN assignment	1	2	3	4