

HONSBERG - RT SERIES FLOW METER

Turbine

RT-015AK001

Flow sensor 1/2" s.s. 0,1-1,1m3/h, PNP

- For liquids up to 250 bar
- Flow from 0.1 to 68 m3/h (1-5 cSt)
- Connection from 1/2" to 2"
- Entirely in stainless steel




PRODUCT DESCRIPTION

Model RT is a turbine transmitter entirely in stainless steel with high flow capacity. It is suitable for applications where there are requirements include a high level of accuracy. The design also makes it suitable for applications with aggressive media or extreme pressure.

TECHNICAL DATA

Accuracy	± 1% of full setpoint
Connection type	External thread G ½ "
Electrical connection	M12x1, 4-pole
Flow range max	1.1 m ³ /h
Flow range min	0.11 m ³ /h
Function	Turbine, hall sensor
IP class	IP67
Load max	100 mA
Material of body	Stainless steel 316
Material storage	Tungsten carbide
Material turbine	Stainless steel 430
Number of pulses/L Ca	2900
Power consumption	20 mA
Pressure drop	Approx. 0.3 bar at maximum flow

Pressure range max	250 bar
Signal outputs	PNP, square wave
Temperature of media from	-20 °C
Temperature of media to	85 °C
Type of flow component	Flow Measuring
Weight	0.32 kg
Viscosity max	5 cSt
Viscosity min	1 cSt
Voltage dc max	30 V
Voltage dc min	10 V

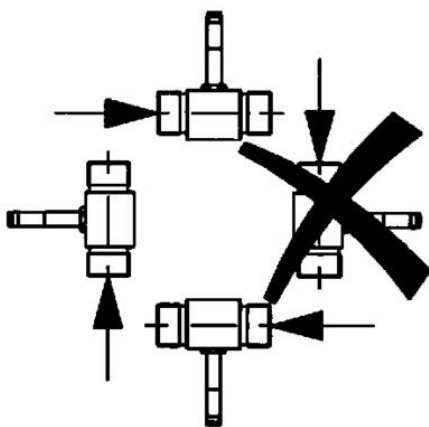


Vatten






Aggressiv media



Olja upp till 5 cSt



G"	L mm	H mm
1/2	64	71
3/4	64	74
1	88	78
1 1/2	114	84
2	132	89

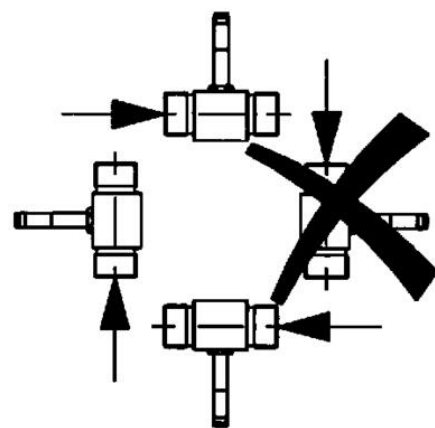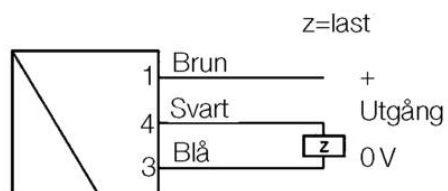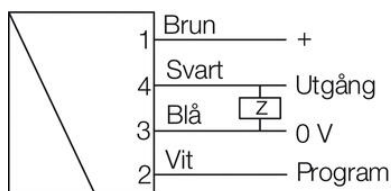


Vatten




Aggressiv media



Olja upp till 5 cSt



G"	L mm	H mm
1/2	64	71
3/4	64	74
1	88	78
1 1/2	114	84
2	132	89

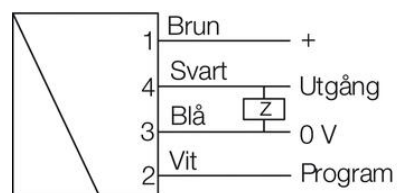

$z = \text{last}$

