

ACTUONIX - MINIATURE LINEAR ACTUATOR PQ12

PQ12-63-12-P

12V, 20mm stroke, up to 45N force with potentiometer

- Up to 50N force
- Up to 28mm/s speed
- 20mm stroke
- 6v or 12v dc with potentiometer or limit switches
- 6V RC controller options



PRODUCT DESCRIPTION

The PQ12 is the original and one of the smallest Actuonix actuator available.


Featuring 20mm stroke over many speed and control options, with a weight down to 15g, it is ideal for compact machine builds requiring controlled linear movement.

- 'S' variant with built in end of travel limit switches to stop movement and cut power.
- 'P' variant with built in potentiometer to give feedback to LAC control board for positional control.
- 'R' variant with built in servo technology to function as a rotary servo actuator in R/C applications.

TECHNICAL DATA

Back drive force	25 N
Duty cycle	20 %
IP class	IP54
Max power	45 W
Nominal speed, no load	15 mm/s
Ratio	63:1
Sound level	55 dB
Stroke	20 mm
Temperature operational max	50 °C
Temperature operational min	-10 °C
Voltage dc	12 V

feature	options
GG: Gear reduction ratio (refer to load curves above)	30, 63, 100 (lower ratios are faster but push less force, and vice versa)
VV: Voltage	6, 12 (DC volts)
C: Controller	P Potentiometer Feedback S Limit Switches R RC Linear Servo (6V Only)

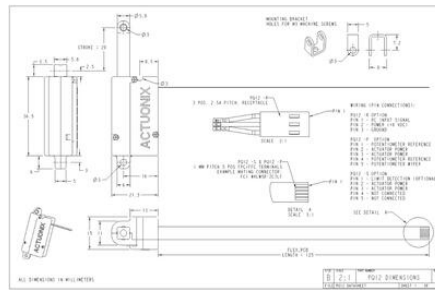

<i>feature</i>	<i>options</i>
GG: Gear reduction ratio (refer to load curves above)	30, 63, 100 (lower ratios are faster but push less force, and vice versa)
VV: Voltage	6, 12 (DC volts)
C: Controller	P Potentiometer Feedback S Limit Switches R RC Linear Servo (6V Only)

