

DATALOGIC - PROTECTIVE HOUSING SG-IP69K

SG-IP69K-150
 95ASE1290 IP69K Protection Tubes for 150mm Light
 Curtains

- IP69K protective housing
- Available for heights 150–1800 mm
- Installation by user



PRODUCT DESCRIPTION

Datalogic SG-IP69K protective housing is a PMMA acrylic tube to protect and seal light curtains of SG2-B, SG2-E, SG4-B and SG BODY COMPACT series. Thanks to SG-IP69K accessory the IP protection of the light curtain is increased from IP65 to IP67, IP68 and IP69K.

The Gore-Tex membrane on the caps prevents water or dirt entering as well as internal condensation. The connection cable for the light curtain is protected and kept in its place by a M16 metric chock that prevents the entry of water or dirt.

The SG-IP69K accessory is particularly suitable where high levels of humidity and temperature are present and machines or equipments are frequently washed with hot water (up to 80°C) at high pressure (up to 100 bars) and/or cleaned with detergents.



SG-IP69K is particularly suitable for FOOD industry applications:

- beverage production
- meat slaughter
- sausage production
- milk/cheese industry



TECHNICAL DATA

IP class	IP67, IP68, IP69K
Material protection	PMMA



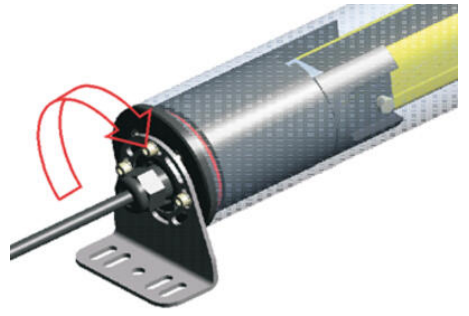

MODEL	L (mm)
SS-PHM-100	271.5
SS-PHM-200	520.7
SS-PHM-400	870.9
SS-PHM-600	1097.7
SS-PHM-700	1190.8
SS-PHM-1000	1570.7
SS-PHM-1200	1620.8
SS-PHM-1500	1970.7
SS-PHM-1800	1700.8
SS-PHM-2000	1870.8
SS-PHM-2-000	813
SS-PHM-3-000	1110
SS-PHM-4-000	1213.5
SS-PHM-4-120	1213.5

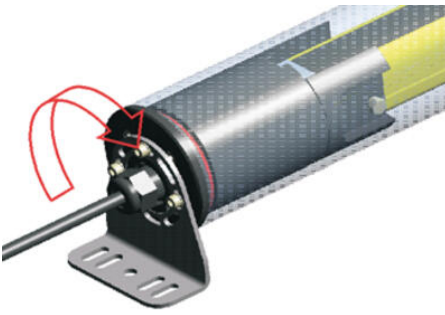

MODEL	L (mm)
SS-PHM-100	271.5
SS-PHM-200	520.7
SS-PHM-400	870.9
SS-PHM-600	1097.7
SS-PHM-700	1190.8
SS-PHM-1000	1570.7
SS-PHM-1200	1620.8
SS-PHM-1500	1970.7
SS-PHM-1800	1700.8
SS-PHM-2000	1870.8
SS-PHM-2-000	813
SS-PHM-3-000	1110
SS-PHM-4-000	1213.5
SS-PHM-4-120	1213.5