OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

DATALOGIC - PROTECTIVE HOUSING SG-IP69K

SG-IP69K-150
95ASE1290 IP69K Protection Tubes for 150mm Light Curtains



- IP69K protective housing
- Available for heights 150–1800 mm
- Installation by user

PRODUCT DESCRIPTION

Datalogic SG-IP69K protective housing is a PMMA acrylic tube to protect and seal light curtains of SG2-B, SG2-E, SG4-B and SG BODY COMPACT series. Thanks to SG-IP69K accessory the IP protection of the light curtain is increased from IP65 to IP67, IP68 and IP69K.

The Gore-Tex membrane on the caps prevents water or dirt entering as well as internal condensation. The connection cable for the light curtain is protected and kept in its place by a M16 metric chock that prevents the entry of water or dirt.

The SG-IP69K accessory is particularly suitable where high levels of humidity and temperature are present and machines or equipments are frequently washed with hot water (up to 80°C) at high pressure (up to 100 bars) and/or cleaned with detergents.
SG-IP69K is particularly suitable for FOOD industry applications:
·beverage production
·meat slaughter
·sausage production
·milk/cheese industry

TECHNICAL DATA

IP class	IP67, IP68, IP69K
Material protection	PMMA



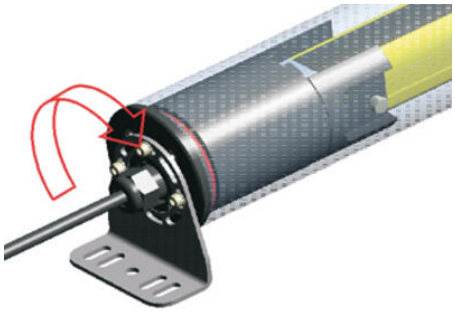



MODEL	L (mm)
SG-IP67K-150	373.5
SG-IP67K-300	520.7
SG-IP67K-450	670.8
SG-IP67K-600	820.7
SG-IP67K-750	970.8
SG-IP67K-900	1120.7
SG-IP67K-1050	1270.7
SG-IP67K-1200	1420.8
SG-IP67K-1350	1570.7
SG-IP67K-1500	1720.8
SG-IP67K-1650	1870.8
SG-IP67K-1800	2020.8
SG-IP67K-2-050	813
SG-IP67K-3-080	1113
SG-IP67K-4-090	1213.5
SG-IP67K-4-120	1513.5



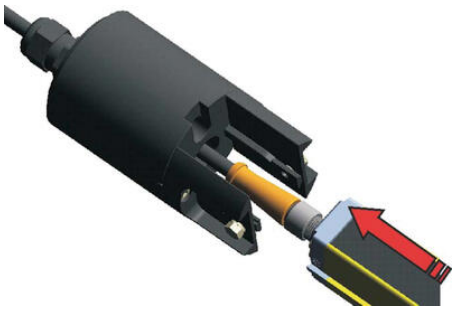

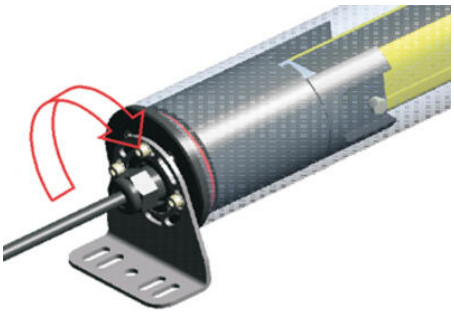



MODEL	L (mm)
SG-IP67K-150	373.5
SG-IP67K-300	520.7
SG-IP67K-450	670.8
SG-IP67K-600	820.7
SG-IP67K-750	970.8
SG-IP67K-900	1120.7
SG-IP67K-1050	1270.7
SG-IP67K-1200	1420.8
SG-IP67K-1350	1570.7
SG-IP67K-1500	1720.8
SG-IP67K-1650	1870.8
SG-IP67K-1800	2020.8
SG-IP67K-2-050	813
SG-IP67K-3-080	1113
SG-IP67K-4-090	1213.5
SG-IP67K-4-120	1513.5