


KUEBLER - INCREMENTAL PULSE TRANSDUCER, STAINLESS STEEL, SENDIX 5006/5026

SERIE 5026

- Housing diameter Ø58 mm
- stainless steel housing
- Axle seal in Viton® from DuPont ©
- Temperature range -40 to +85 ° C

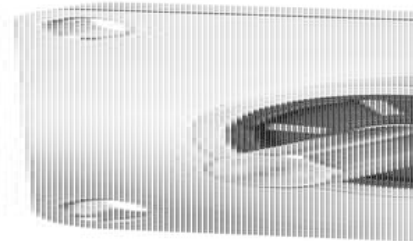

PRODUCT DESCRIPTION

Sendix 5006/5026 is a robust incremental shaft sensor specially designed for industrial use outdoors or in the food industry. The shaft seal is in Viton® material from DuPont. Viton® is specially designed to cope with chemical impact. With its powerful housing, the sensor is more protected from impact and impact than previous models in the 58XX series. With the new Safety-Lock™ construction, the bearings in the angle sensor have been placed with a larger line spacing and a special locking latch that prevents stock displacement in any direction.

The sensor comes with shaft and hole shaft, in combination with several different flanges to fit where 58mm sensors have previously been sitting.

Please refer to the images below for ordering information.

Order code Shaft version		8.5006 Type	. XXXX4 . a b c d	XXXX e
a Flange		c Output circuit / power supply		
7 = clamping flange Ø 58 mm [2.28"]		2 = push-pull (7272 compatible with inverted signal) / 5 ... 30 V DC		
A = synchro flange Ø 58 mm [2.28"]		5 = push-pull (with inverted signal) / 10 ... 30 V DC		
C = square flange □ 63.5 mm [2.5"]		4 = RS422 (with inverted signal) / 5 V DC		
b Shaft (ø x L), with flat		d Type of connection		
1 = ø 6 x 10 mm [0.24 x 0.39"]		4 = radial M12 connector, 8-pin		
3 = ø 10 x 20 mm [0.39 x 0.79"]		e Pulse rate		
8 = ø 3/8" x 7/8"		1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)		
		Optional on request		
		- other pulse rates		
		- Ex 2/22		
		- seawater resistant (stainless steel V4A)		
		Stainless steel V4A as standard types (deliverable as from 1 unit)		
		8.5006.73X4.XXXX-V4A		
		V4A 1.4404		

Order code Hollow shaft		8.5026 Type	. XXXX2 . a b c d	XXXX e
a Flange		c Output circuit / power supply		
1 = with spring element, long		2 = push-pull (7272 compatible, with inverted signal) / 5 ... 30 V DC		
C = with stator coupling, Ø 63 mm		5 = push-pull (with inverted signal) / 10 ... 30 V DC		
		4 = RS422 (with inverted signal) / 5 V DC		
b Through hollow shaft		d Type of connection		
2 = ø 1/4"		2 = radial M12 connector, 8-pin		
4 = ø 3/8"		e Pulse rate		
3 = ø 10 mm [0.39"]		1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)		
5 = ø 12 mm [0.47"]		Optional on request		
6 = ø 1/2"		- other pulse rates		
8 = ø 15 mm [0.59"]		- Ex 2/22		
		- seawater resistant (stainless steel V4A)		
		Stainless steel V4A as standard types (deliverable as from 1 unit)		
		8.5026.18X2.XXXX-V4A		
		V4A 1.4404		

TECHNICAL DATA

Connection	M12
------------	-----

Housing diameter	58 mm
IP class	IP66, IP67
Mounting	Hollow shaft
Output	Push/Pull, RS422
Pulse max	5000
Sensor type	Incremental
Shaft diameter max	15 mm
Shaft diameter min	10 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	5 V DC
Temperature operational max	85 °C
Temperature operational min	-40 °C
Version	Multiturn

Terminal assignment

Output code	Type of connection	MT2 connector, 8 pins
0, 4, 5	Signal	0 V
1000, 4	Signal	0 V
1000, 2	Signal	0 V
	Pin	1 2 3 4 5 6 7 8

0 V Encoder power supply (+VDC)
0 V Encoder power supply (ground) (GND) (0 V)
A, S Incremental output channel A
B, S Incremental output channel B
Z, S Reference signal
Pin 4: Plug connector housing (shield)

Top view of mating side, male contact base



MT2 connector, 8 pins

Terminal assignment

Output code	Type of connection	MT2 connector, 8 pins
0, 4, 5	Signal	0 V
1000, 4	Signal	0 V
1000, 2	Signal	0 V
	Pin	1 2 3 4 5 6 7 8

0 V Encoder power supply (+VDC)
0 V Encoder power supply (ground) (GND) (0 V)
A, S Incremental output channel A
B, S Incremental output channel B
Z, S Reference signal
Pin 4: Plug connector housing (shield)

Top view of mating side, male contact base



MT2 connector, 8 pins