
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CROUZET GN3 SERIES SOLID STATE RELAY

Panel mount - AC output Three phase

GN325DSZH
SSR GN3 4-32VDC Control 510VAC

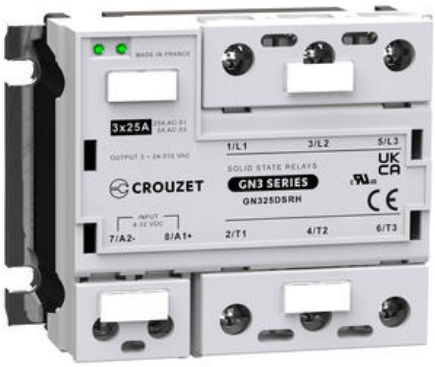

- Zero cross or instantaneous switching
- Output current 25 or 50 amps
- Built-in overvoltage protection
- LED input status indicator

PRODUCT DESCRIPTION

TECHNICAL DATA

OVERVIEW

Output current	25 A
Output voltage	24-510V ac
Control voltage	4-32V dc
Mounting	Panel mount
Type of control	Zero voltage turn on

OUTPUT SPECIFICATION

Output voltage	24-510V ac
Transient Voltage	1200 V pk
Maximum off-state leakage current	1 mA rms
1 Second surge current	96
Maximum 1 cycle surge current	320/_ (min) 420 (typ)
Maximum on-state voltage drop	1.375 Vpk
Thermal resistance junction to case	0.7 °C/W
Maximum 1/2 Cycle I^2t for fusing (A^2 sec)	512/880
Minimum heat sink for rated current @ 40 °C	5.2 °C/W
Number of poles	3

INPUT SPECIFICATION

Control voltage	4-32V dc
Maximum reverse voltage	-32V dc
Minimum turn-on voltage	4V dc
Must turn-off voltage	1V dc
Input current min	20 mA
Input Current Max	25 mA
Maximum turn-on time (ms)	1/2 cycle
Maximum turn-off time (ms)	1/2 cycle

GENERAL SPECIFICATION

Dielectric strength input to output (50/60Hz)	4000 V rms
Ambient operating temperature	-40 ... +80°C
Ambient storage temperature	-40 ... +100°C
Weight	200 g
Height	69.3 mm
Width	100 mm
Depth	34.7 mm
Housing material	UL94 V-0
Material base	Aluminium
LED input status indicator	Green
Approvals	CE, cRUus, UKCA