

INSULATED BOOTLACE FERRULE FOR DUAL CABLES

V30AE000606

0.75mm² x 8mm Dual Ferrule - White

- Funnel feed-in made of polypropylene
- Heat resistant up to 120 °C
- For wires from 0.5...16 mm²
- Material: E-Cu/A-Cu, galvanically tin-plated



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Colour	White
Cross section max	0.75 mm ²
Rated wire cross section to (AWG)	18
Standard	German Standard

DIMENSIONS

Length	14 mm
Length of tube	8 mm
Stripping length	11 mm
Thickness of collar	0.3 mm
Thickness of tube	0.15 mm
Diameter of tube	1.7 mm

MATERIALS

Conductor tube	Copper alloy
Contact surface	Galvanic tin-plated, shiny

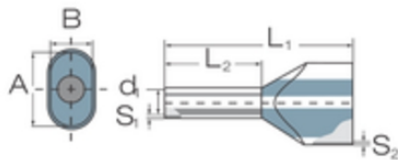

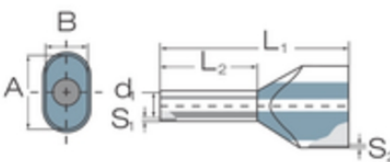
Plastic collar	Polypropylene-homopolymer
Operating temperature from	-5 °C
Operating temperature to	105 °C

APPROVALS

DIN 46228-4:1990	Yes
DIN 46228-1:1992	No

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	0.14 g
Pack size	500

[illegible][illegible]