



PANEL MOUNT BEACON WITH SOUNDER, E SERIES

813511313

LED Panel mount buzzer, Ø45mm, Amber, 230-240 V
ac, ELM

- Ø 22.5mm Hole mounted panel mount buzzer with LED beacon
- 85-103 dB Range
- Continuous, Pulsing or wobble tones



PRODUCT DESCRIPTION

The E series of panel mounted LED buzzers offers a high quality and flexible signalling solution.

- universally useable panel mount buzzer with LED control light
- sizes Ø 65 mm – Ø 45 mm
- models:

ELG-ELM panel mount buzzer – LED control light sound and light synchronized continuous tone – steady light pulsing tone – flashing light in pulse frequency wobble tone – flashing light in pulse frequency


EDG-EDM panel mount buzzer – LED control light continuous tone and steady light separately switchable

- well distinguishable tone types via terminal selectable (ELG)
- volume also in mounted condition infinitely adjustable
- LED control light – high brightness, maintenance free
- PLC fit (leakage/inrush current)
- for mounting in Ø 22 mm and 30,5 mm bore holes (with adapter)

TECHNICAL DATA

Diameter	45 mm
Flash frequency	2 Hz
Housing Colour	Black
IP class	IP65
Lens colour	Orange
Light source	LED
Light type	Orange LED
Mounting	Panel mount

Nominal current max	0.04 A
Nominal current min	0.04 A
Number of tones	3
Sound control	Yes
Sound level max	98 dB
Sound level min	85 dB
Supply voltage	230 V
Supply voltage ac max	253 V AC
Supply voltage ac min	207 V AC
Temperature operational max	60 °C
Temperature operational min	-25 °C
Terminal connection	2.5 mm ²
Tone frequency max	3500 Hz
Tone frequency min	3500 Hz
Weight	65 g

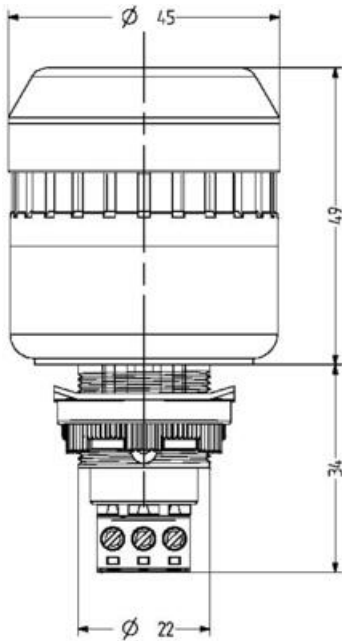


Tone table

Tone and light selection on terminal

La	N	Lb	Tone and light synchronized
X	X		pulsing tone / LED flashing light
X	X	X	continuous tone / steady light



Justerbar volym med hjälp av potentiometer

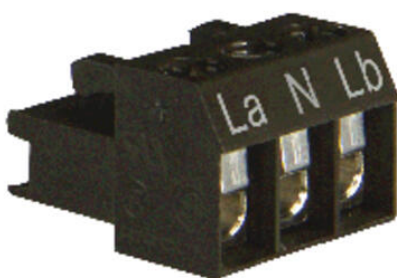

Justerbar volym med hjälp av potentiometer

