

DATASENSING VISION SENSOR DATAVS2 REID

DATAVS2-06-REID
Vision Sensor, 6mm lens, ID, Red LED

- Controls for bar code, Datamatrix and OCV
- Memory for up to 20 different inspections
- 3 outputs
- R232 interface



PRODUCT DESCRIPTION

DataVS2 is a series of Vision sensors for flexible solutions for machine applications.


The sensor is complete with optics, red LED lighting and electronics in a compact housing. The parameters in the sensor are set via PC through Ethernet communication. The software comes with the sensor and is developed to lead the user step by step through parameter setting. DataVS2 is available in 4 different versions with different control instruments.

Identification ID - Reads bar codes, datamatrix and OCV.

TECHNICAL DATA

Digital interface	Ethernet 10/100 Mbs (4-pole M12 -connector)
Electrical connection	M12 4-pole D-coded, M12 8-pin connector
Frame rate	60
IP class	IP50
Lens material	ABS plastic
Material protection	Aluminium
Optics	6mm integrated lens
Output	3xPNP, RS232
Output current max	0,1 A
Power consumption max	0,1 A
Resolution	640x480 (VGA)
Temperature operational max	50 °C
Temperature operational min	-10 °C

Voltage dc max	24 V
Voltage dc min	24 V
Voltage tolerance	10%

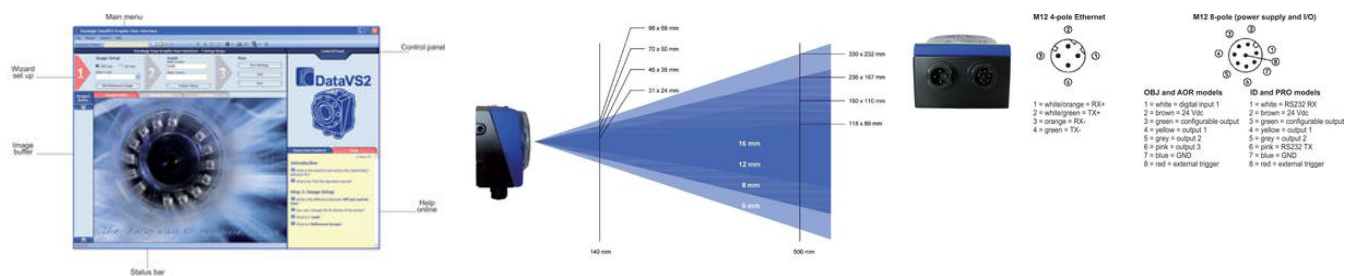

- Step 1: Image Setup**
- The first step consists in connecting the sensor and configuring the image quality parameters. When the desired results are obtained, the user can memorise the image that will be used as a template during sensor functioning.
- Step 2: Teach**
- The second step establishes the acceptance criteria to distinguish objects from wastes. One or more controls can be selected according to the task to carry-out.
- Step 3: Run**
- The third step configures the sensor digital outputs, simulates sensor functioning on the PC to verify the controls chosen and activates the operating phase on the sensor using the PC only to control the diagnostics.

