



QUARTER-TURN COMPACT LATCH 13,5 MM STAINLESS STEEL

This complete latch consists of housing, nut, insert, washer, screw and cam. To achieve protection degree IP65, an O-ring and a flat gasket is applied. The latch can be supplied un-assembled, pre-assembled with enclosed cam or completely assembled. Waterproof according to NEMA 4.



MATERIAL

Cam: Stainless steel 304
Housing: Stainless steel 303
Insert: Stainless steel 303
Nut: Stainless steel 303


RELATED PRODUCTS

Keys: 2-372, 2-370
Handles and knobs: 2-111
 Use Product ID at industrilas.com

TESTS & STANDARDS

* = also classed Waterproof according to NEMA 4.

Standards: IP65, NEMA 4

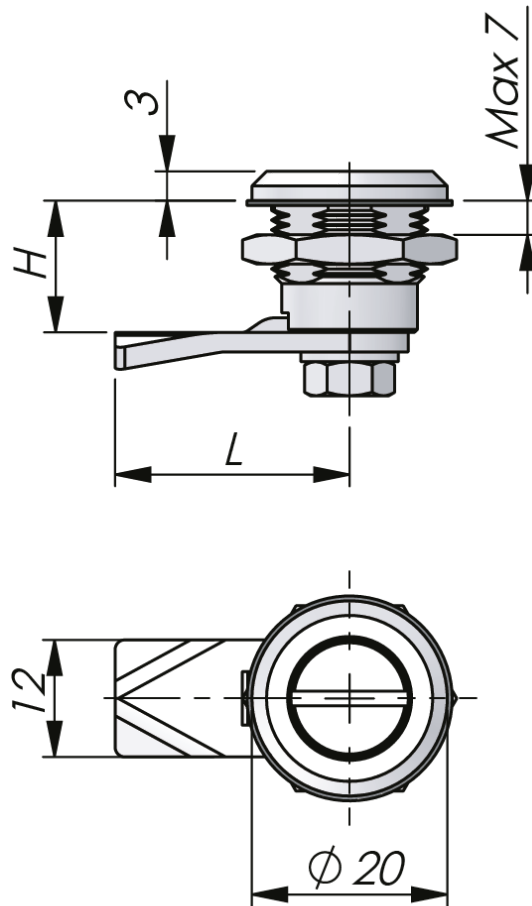

Make your selections in each column to create your article number (AAAA-BCCDEF-HHLL)

AAAA Housing	B Nut	CC Insert	D Material insert and housing	E Assembly	F Cam	HHLL H/L in mm
2383 Stainless steel 303	3 SS 303	01 Square 6	3 SS 303	0 IP54, not assembled	3 SS 304	0000 No cam
		02 Square 6 / M3		1 IP65, not assembled		0724 7,5/24
		13 Triangle 6,5		2 IP54, enclosed cam		0727 7,5/27
		26 Slotted		3 IP65, enclosed cam		0730 7,5/30
				4 IP54, assembled		0934 9/34
				5 IP65, assembled		1027 10,5/27
						1324 13,5/24*
						1327 13,5/27*
						1627 16,5/27
						1834 18/34
						1924 19,5/24
						1927 19,5/27
						2824 28/24

