


产品技术规格书
(Product Technical Specification)

No.	名称 (Name)	规格 (Specification)		No.	名称 (Name)	规格 (Specification)			
1	型号 (Model)	AZURE-1218M10M		14	视场角 F.O.V (DxVxH)	。" /	2/3	1/2	1/3
2	物料代码 (Material Code)	3. A01. 010121810				D	48.9	36.8	28
3	靶面格式 (Image Format)	2/3 "				H	40.1	29.7	22.5
4	分辨率 (Resolution)	10MP				V	30.6	22.5	17
5	焦距 (Focal Length)	12mm		15	接口 (Mount)		C		
6	后截距 (Back Focus)	16.22mm		16	适用物距 (Suitable Distance)		0.1-∞m		
7	F值 (F/ No.)	1.8		17	最佳物距 (Optimum Working Distance)		1m		
8	光圈 (Iris Type)	Manual		18	镀膜 (Coating)		400nm-950nm		
9	畸变 (Distortion)	<-0.42%		19	外形尺寸 (Dimention)		φ 39×47.83mm		
10	通光口径 (Lens Effective Diameter)	前面 (Front)	φ 23.33mm	20	重量 (Weight)		140g		
		后面 (Back)	φ 18.80mm	21	工作温度 (Operating Temperature)		-20℃~+65℃		
11	相对照度 (Relative Illuminate)	63.8%		22	镜头组成 (Lens Construction)		11-8		
12	光学总长 (TTL)	62mm		23	最大主光线入射角 (CRA)		2.89°		
13	设计波长 (Design Wavelength)	400~700nm		24	滤镜尺寸 (Filter Thread)		M30.5×0.5		

Size:

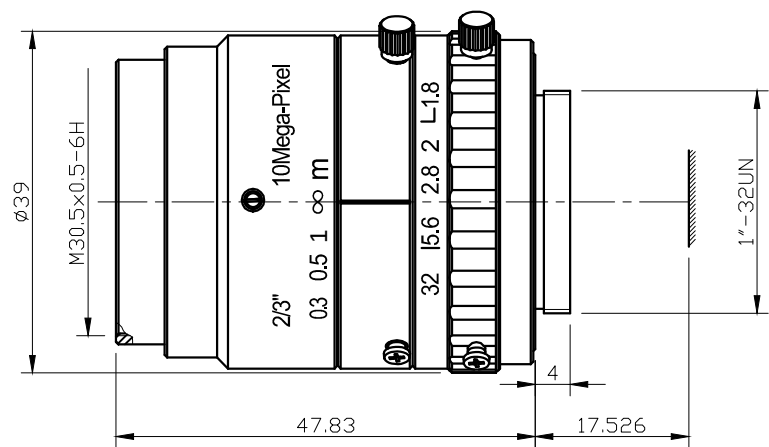

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd