

SLO 5CR


SL-series plug-in output relay

Main features

- Solid state output relay
- cULus Listed, CE (EMC and LVD)
- Integrated status LED
- For resistive and slightly inductive loads



Functional block diagram

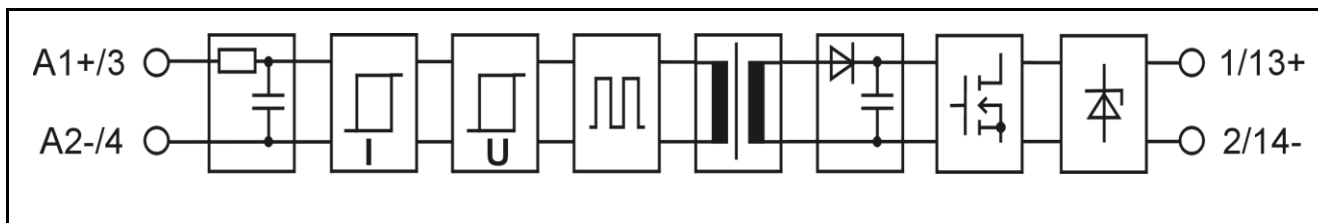

Main specifications

Breakdown voltage I/O	minimum	4600	VAC rms
Air/creepage distances I/O	minimum	8	mm
Capacitance I/O	typical	3	pF
Material of the casing	PBT	UL 94V-0	
Colour of the casing		Red	
Weight	typical	40	g
Temperature range:			
Storage	range	-40...+70	°C
Operation	range	-40...+70	°C

Electrical specifications ($T_A = 25\text{ °C}$)


Primary				Secondary			
Input voltage	nominal	5	VDC	Load voltage	minimum	0	VDC
Input current at nominal voltage	typical	12	mA		nominal	60	VDC
	maximum	15	mA		maximum	66	VDC
Input voltage range (abs.)	minimum	3	VDC	Load current	maximum	3	A
	maximum	7	VDC	Load current	maximum	15	A (10 ms)
Input impedance	typical	0,42	kΩ	Voltage drop	typical	0,5	V (3 A)
Switch-on voltage *	typical	2,7	VDC	Switch-on delay	typical	0,3	ms
	maximum	3	VDC		maximum	0,5	ms
Switch-off voltage	typical	2,5	VDC	Switch-off delay	typical	0,3	ms
	minimum	2	VDC		maximum	0,5	ms
				Inductive load, L/R	maximum	0,5	ms (60 V, 3 A)
					maximum	5	ms (24 V, 2 A)
				Leakage current (off-state)	maximum	1	mA

Ambient temperature (T_A) means the temperature immediate in vicinity of relays, where the air flow meets the relays.

* In the operational temperature range -40 °C...+70 °C the switch-on voltage is 4,25 VDC maximum (5 VDC -15 %).

Deratings

Allowed load is derated to 1/3 linearly from +30 °C to +70 °C ambient temperature. When relays are mounted together as a bank the maximum load current for long period of time should be restricted in total to 50 % of the current from the curve. I.e. all relays at 50 % load continuously or 50 % of the relays at 100 % load continuously or all relays at 100 % load 50 % of the time. This restriction does not apply if there is at least 12,5 mm gap between relays. These deratings apply when assembled to the horizontal rail. If assembled to the vertical rail, must be taken care that the relays do not heat up too much.

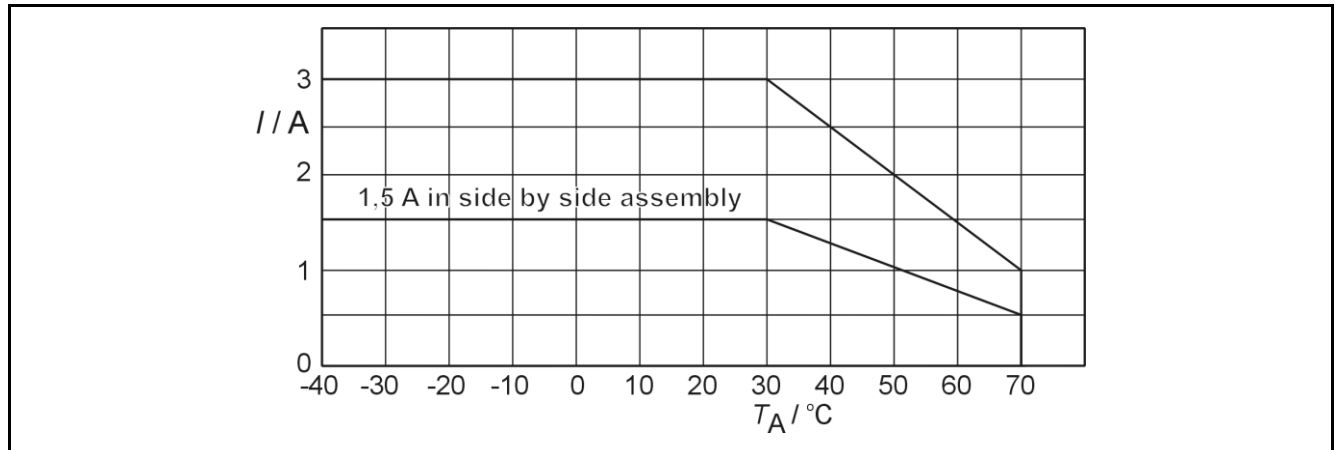

Derating curve for SLO 5CR.

Derating when switching inductive loads

This relay is meant for resistive and slightly inductive loads. A clamp diode with the load must be used when switching inductive loads. The surge current is not allowed to exceed the specification. For reasons of heat dissipation, when the load will be switched frequently, the average current over a reasonable time should not exceed the specification for continuous operation.


Fusing

To protect relay against short circuit and overload a fast fuse with the correct rating for the load and the capacity of the relay should be chosen. Note that when overload current is not large it is possible that the fuse will not protect the relay because of the tolerance on the fuse rating.

Assembling

All MOS 1... -mounting sockets, all MBS 8/16... -mounting bases. The recommended installation is to the horizontal rail for better cooling of the relays.

Mechanical dimensions

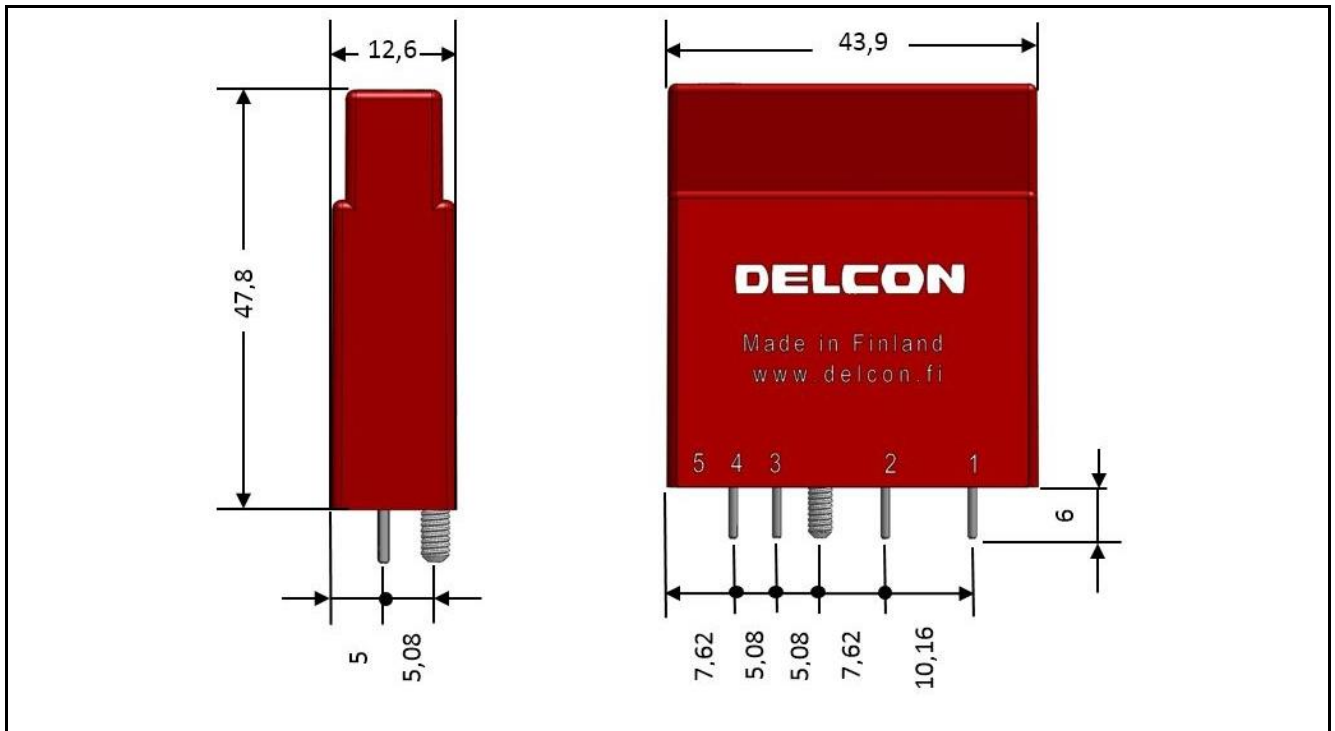

SLO-relay (plug-in), dimensions in mm, nominal.

Approvals

	Certificate: E162828
	Fulfil main requirements of the EMC-directive 2004/108/EC. Fulfil requirements of the low voltage directive (LVD) 2006/95/EC.

Guarantee

This solid state I/O relay type made by Delcon Oy is guaranteed free from design and manufacturing defects for a period of 10 years from the manufacturing date. The guarantee liability is limited to replacement of defective material and related shipping charges. Defective products must be returned to the manufacturer for evaluation. This guarantee does not cover damage due to incorrect use or electrical overload.