




2/3" 1.4/25mm C		2/3"	1/1.8"	1/2"
FOCAL LENGTH		f=25mm		
MAX. DIAMETER (RATIO)		F=1 : 1.4,4,8,16		
ELEMENT		6 8		
PICTURE SIZE		6.6×8.8mm	5.4×7.2	4.8×6.4
ANGLE	VER. ANGLE	14.8°	12.1°	10.5°
	HOR. ANGLE	19.6°	16.1°	14.0°
	DIA. ANGLE	24.3°	20.0°	17.5°
DISTORTION (TV)		-0.04%		
SHOOTING RANGE AT	VER.	53.3 mm	43.4	38.6
	HOR.	71.1 mm	57.9	51.7
	DIA.	89.0 mm	72.4	64.6
MINIMUM FOCUS DISTANCE		0.2m		
FLANGE BACK		17.526 mm in air		
BACK FOCUS		11.7mm in air (Mechanical 10.2mm in air)		
FILTER SCREW SIZE		M27×0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT ø24.0mm REAR ø12.8mm		
MOUNT		C-MOUNT		
EXIT PUPIL		-77.0mm		
TEMPERATURE RANGE		-10~+50° C		
STORAGE TEMPERATURE RANGE		-20~+60° C		
RESOLUTION CENTER/CORNER		CENTER 120lp/mm CORNER 100lp/mm		
WEIGHT		83g		

NOTE:Specifications and availability are subject to change without notice.

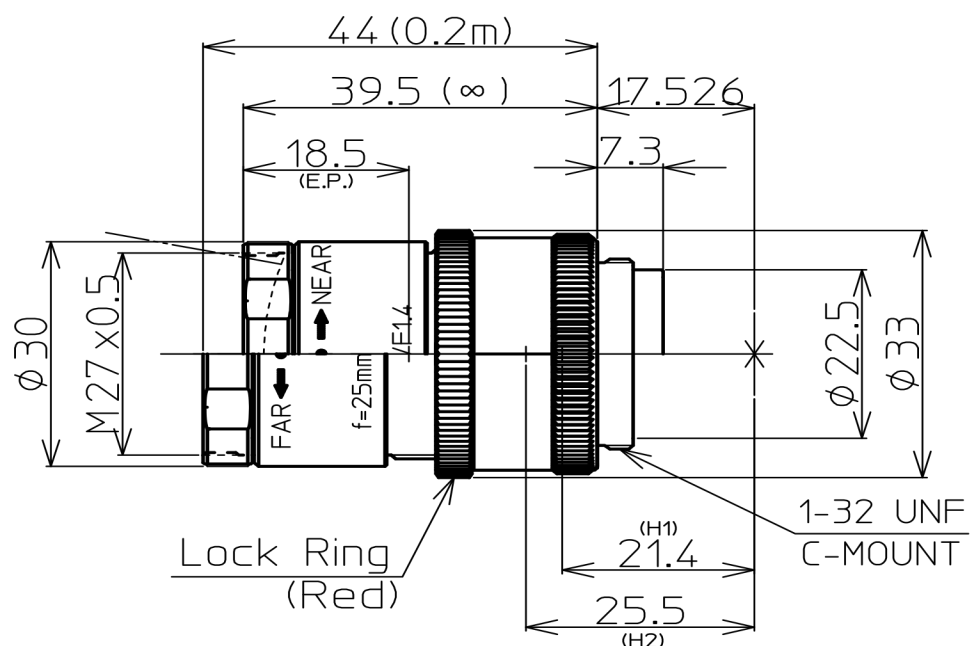

		1/1	
		2/3" F1.4 f=25mm	
2014.12.26		LM25JCM-V	
2014.6.9			